


PermaDOCK Scissor Lift Table

STANDARD FEATURES



1. Remote **Powerpack** standard 5-HP North American made c/w self-contained adjusting valves.

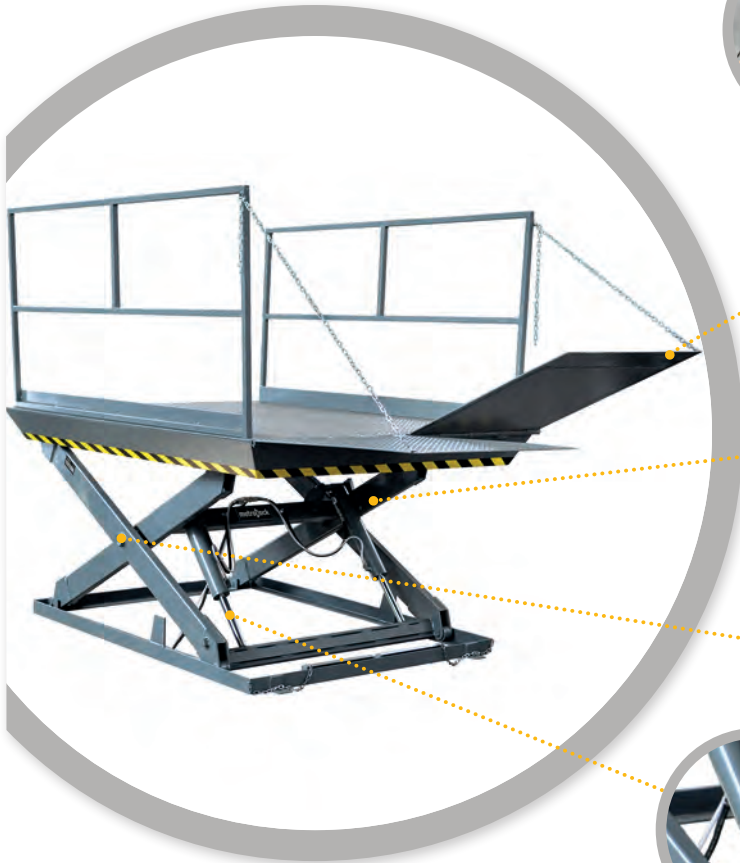

2. **Split Checker Entry Plates** complete with high tensile seamless hinge tube.



3. **Tubular Scissor Legs** – constructed of HSS tubing. Minimum 1/4" wall on all capacities.



4. **Axle Pins** – Enlarged axle pins provides larger bearing surface for added stability while increasing scissor longevity.



5. **Hydraulic Cylinders** (self-bleeding) A minimum of 2 displacement cylinders North American made with a minimum 3" diameter housing. Complete with fall safe protection.

SPECIFICATIONS

1. 5,000 lbs. capacity
2. 18" reach split lip
3. Tapered edges
4. Remote 5-HP, 3 phase power pack
5. (2) 42" high removable guardrails complete with mid rail & 4" kick plate
6. Adjustable up limit switch
7. Fall safe protection on each hydraulic cylinder
8. Lubricating for life "DU" bushings

OPTIONS

- Up to 20,000 lbs. capacity
- Longer reach entry plates
- Aluminum entry plates
- Up to 10-HP powerpacks, 3phase
- Safety trip bars
- Hydraulically operated entry plate control
- Deck mounted control station
- Hot dipped galvanized