


**Perma Tech Inc.**

**PT- 9000HPL**

**FULLY GASKETED**

## **Decorative Wood Core Door Personnel and Cart Traffic**

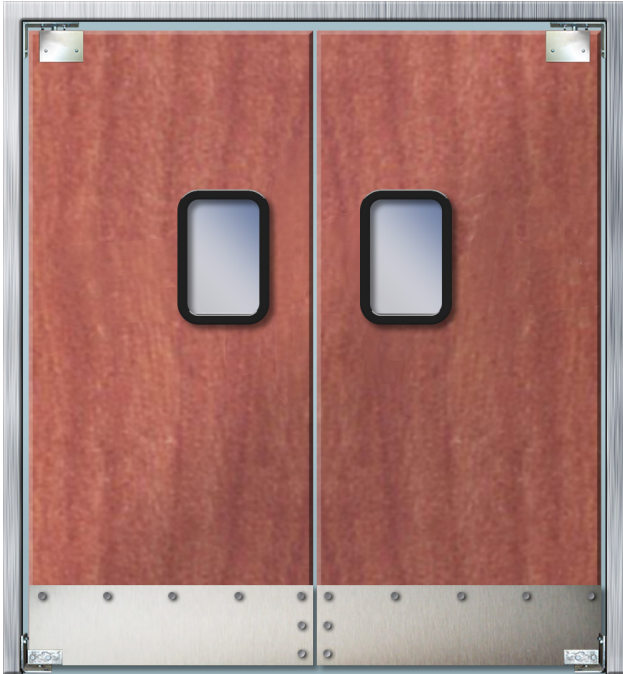

PT-9000HPL shown with impact plates.

### **DOUBLE ACTING "INSULATED" TRAFFIC DOOR**

- **CONSTRUCTED WITH A TOUGH HARDWOOD PLYWOOD CORE**
- **HIGH PRESSURE LAMINATE FINISH**
- **IDEAL FOR RESTAURANT, FOOD SERVICE & RETAIL APPLICATIONS**
- **STAINLESS STEEL SCUFF PLATE**
- **EASY TO INSTALL & MAINTAIN**

*Perma Tech Inc. doors are available in single or double panel.*



## **FEATURES:**

- Doors are constructed with a 3/4" hardwood plywood core.
- A variety of high pressure laminated finishes are available with 12" high stainless steel at the bottom. Optional finishes include all stainless steel (20 ga.) or .032 aluminum.
- Hinges are GS type with hardened CAM plate , rollers, dust covers and bottom pin assembly.
- Standard windows are 9" x 14" x 1/4" acrylic set in a custom rubber extrusion.
- The door edges are black PVC edge trim or optional Stainless Steel cap or gasket.
- The door is manufactured to fit up to an 8' x 8' bi-parting or 4' x 8' single panel opening.

## **Perma Tech Inc.**


363 Hamburg Street • Buffalo, NY 14204

Phone: 716.854.0707 • Fax: 716.854.0774

Sales@PermaTechInc.com • www.PermaTechInc.com

# ARCHITECTURAL SPECIFICATIONS

Where indicated on plans, furnish Model 9000HPL double acting gravity actuated traffic door as manufactured by National Access Design LLC, Cincinnati, Ohio. Doors are constructed with a 3/4" plywood core and high pressure laminate finish. Windows are 9" x 14" x 1/4" acrylic set in a custom extrusion. The door edge has a PVC edge trim. The bottom of the door has a 12" high ga. stainless steel plate. The hardware includes low profile GS style hinges with rollers and bottom pin assembly

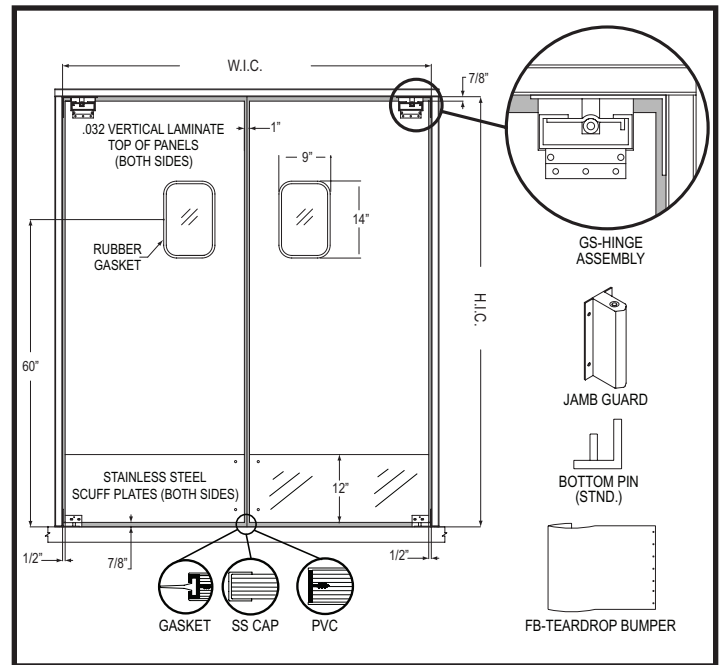

**To fit door opening size:**

\_\_\_\_\_ width x \_\_\_\_\_ height

- SINGLE
- BI-PARTING
- LEFT
- RIGHT

**OPTIONS:**

**TEARDROP BUMPERS (BOTH SIDES)**

- TB12 (12")
- TB18 (18")
- TB24 (24")
- TB30 (30")
- TB36 (36")
- TB42 (42")
- TB48 (48")

**STAINLESS STEEL IMPACT PLATES**

- SS12 (12") (STANDARD)
- SS18 (18")
- SS24 (24")
- SS30 (30")
- SS36 (36")
- SS42 (42")
- SS48 (48")

**JAMB GUARD OPTIONS**

- JG10 (10")
- SSJG10 (10") STAINLESS STEEL

**WINDOWS**

- 6" X 12"
- 9" X 14" (STANDARD)
- 22" X 22"
- 10" X 30"
- 14" X 16"

**FACING**

- 9000HPL HIGH PRESSURE LAMINATE (STANDARD)
- 9000AL ALUMINUM
- 9000SS
- 9000ALC INCLUDES ALUMINUM TOP AND 48" STAINLESS STEEL IMPACT PLATE

**DOOR FRAMES**

- TUBE STYLE - STAINLESS STEEL
- TUBE STYLE - PRIMED STEEL
- TUBE STYLE - POWDER COATED
- C-CHANNEL - STAINLESS STEEL
- C-CHANNEL - PRIMED STEEL
- C-CHANNEL - POWDER COATED

**OTHER**

- RUB RAILS / CART GUARDS
- SSGS HINGES (STAINLESS STEEL)



PT-9000 HDL Traffic Doors are shipped FOB Factory.

Customer: \_\_\_\_\_

Approved By: \_\_\_\_\_ Date: \_\_\_\_\_

Perma Tech Inc. • 363 Hamburg Street • Buffalo, NY 14204

Sales@PermaTechInc.com • www.PermaTechInc.com