






# DOUBLE-ACTING RIGID TRAFFIC DOOR

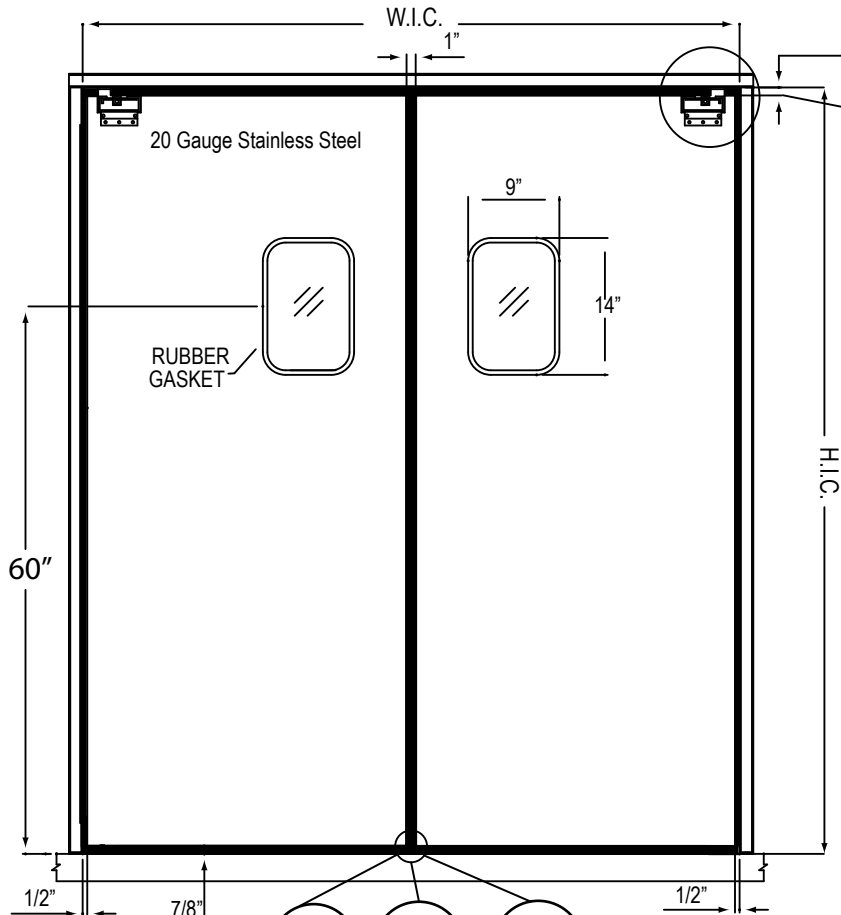

Doors to be constructed of a 3/4 Hardwood Plywood Core.

Standard features are:

- GS type hinge.
- Bottom pin assembly.
- 9"x14" x 1/4" Acrylic Window Set in Rubber Gasket.



363 Hamburg Street, Buffalo, NY 14204

Tel: 716-854-0707

Fax: 716-854-0774

Sales@PermaTechInc.com

www.PermaTechInc.com

## DOOR SPECIFICATIONS

Opening Width \_\_\_\_\_ x Height \_\_\_\_\_  
Qty. \_\_\_\_\_

BI-PARTING	SINGLE PANEL	
	L	R

### TEARDROP BUMPER

FB12"	FB18"	FB24"
FB30"	FB36"	FB42"
FB48"		

### IMPACT PLATES (BLACK ABS STANDARD)

PL12"	PL18"	PL24"
PL30"	PL36"	PL42"
PL48"		STAINLESS STEEL

### EDGE TRIM

PVC (RIGID)	STAINLESS STEEL EDGE CAP
FULL GASKET	

### WINDOW SIZE

9"x14"	14"x16"
22"x22"	10"x30"

### HARDWARE OPTIONS

(STANDARD) GS HINGE W/ BOTTOM PIN  
GS HINGE W/ (OPTIONAL) 10" JAMB GUARD  
STAINLESS STEEL HARDWARE

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: \_\_\_\_\_

Date: \_\_\_\_\_

## PT- 900SS & 900SSV

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.