

Perma Tech Inc.

PT-9100 OR PT-9100V

FULLY GASKETED

Industrial • Commercial Application Heavy Cart to Medium Motorized Traffic



Picture shown is PT-9100V it has an optional 14" x 16" vision panel and 18" high teardrop bumpers.

DOUBLE ACTING "INSULATED" TRAFFIC DOOR

- **INSULATED DOORS WITH INTERNAL STRUCTURAL ALUMINUM FRAMING**
- **IDEAL FOR MEDIUM MOTORIZED TRAFFIC IN AREAS WHERE TEMPERATURE CONTROL IS REQUIRED**

- **DOORS ARE USDA ACCEPTED**

Perma Tech Inc., doors are available in single or double panel.



FEATURES:

- Doors are constructed with welded aluminum framing, insulated with expanded polystyrene. Overall thickness 1".
- Hinges are V-CAM assembly with 10" jamb guard for PT-9100V or GS style rollers with bottom pin for Model 9100.
- Standard windows are 9" x 14" x 1/4" acrylic set in low profile, high strength sealed plastic frames.
- Available standard colors are black, canyon blue, green, brown, white, beige, dark gray, light gray and red.
- Doors can be manufactured to fit up to an 8' x 10' bi-parting or 5' x 10' single panel opening. *Consult factory for larger openings.*
- Washdown package available.

Perma Tech Inc.

363 Hamburg Street • Buffalo, NY 14204

Phone: 716.854.0707 • Fax: 716.854.0774

Sales@PermaTechInc.com • www.PermaTechInc.com

ARCHITECTURAL SPECIFICATIONS

Where indicated on plans, furnish model 9100 double acting, gravity actuated traffic door as manufactured by Perma Tech Inc. Doors shall be constructed with welded aluminum framing and expanded polystyrene in-sulation. Overall thickness will be 1". Windows to be 9" x 14" x 1/4" acrylic set in low profile plastic frames. Facing to be ABS high impact plastic. Doors to have full perimeter gasket. Hardware to be GS style hinge with cam plate, rollers and bottom pin assembly, or V-CAM with 10" jamb guard.

To fit door opening size:

_____ width x _____ height

- Single
- Bi-Parting

OPTIONS:

Teardrop Bumpers, Impact Plates and Jamb Guards, are available as upgrades.

TEARDROP BUMPERS (BOTH SIDES)

- FB12 (12")
- FB18 (18")
- FB24 (24")
- FB30 (30")
- FB36 (36")
- FB42 (42")
- FB48 (48")

IMPACT PLATES (BOTH SIDES)


- PL12 (12")
- PL18 (24")
- PL24 (24")
- PL30" (30")
- PL 36 (36")
- PL42 (42")
- PL48 (48")

STAINLESS STEEL

- SS12 (12")
- SS18 (18")
- SS24 (24")
- SS30 (30")
- SS36 (36")
- SS42 (42")
- SS48 (48")

WINDOWS

- 9" x 14" (STND)
- 14" x 16"
- 22" x 22"
- 10" x 30"

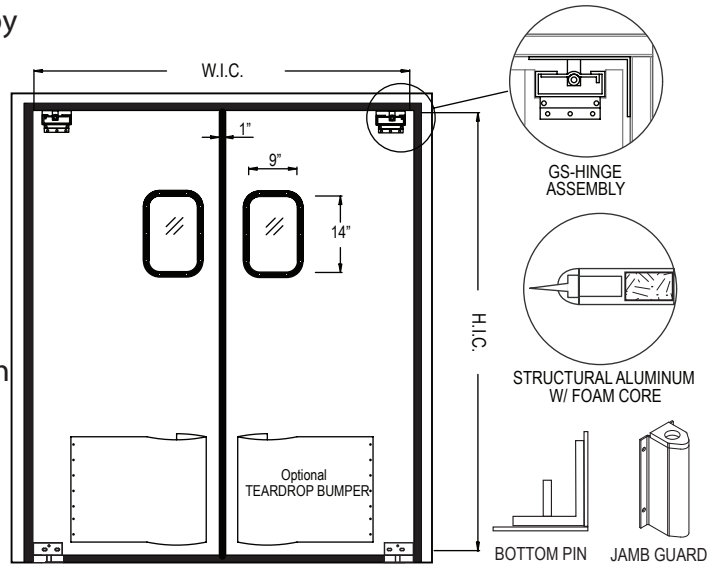

JAMB GUARD OPTIONS

- Bottom Pin (STND) w/GS Hinge
- JG 10" (STND) w/V-CAM Hinge
- Stainless Steel Hinge Option

FACING

- ABS (STND)
- Stainless Steel

DOOR FRAMES

- Tube Style - Primed Steel
- Tube Style - Stainless Steel
- Tube Style - Powder Coated
- C-Channel - Primed Steel
- C-Channel - Stainless Steel
- C-Channel - Powder Coated

OTHER

- Cane Bolts
- Locking Sleeve
- Limiting Posts
- Rub Rails / Cart Guards
- Urethane Insulation Upgrade



PT-9100 or PT-9100V Traffic Doors are shipped FOB Factory.

Customer: _____

Approved By: _____ Date: _____

Perma Tech Inc. • 363 Hamburg Street • Buffalo, NY 14204

Sales@PermaTechInc.com • www.PermaTechInc.com